


**2WAY SPECIFICATION****Page 1****2-WAY Description.**

2 Way track is Aluminium extruded system that shares the carriers from the Triple E 3WAY system. The track is available in self colour Aluminium or black anodised finish. The external dimensions are 35mm (1 3/8") wide x 40mm high (1 5/16"). The lower part of the track contains a channel that accepts wheeled carriers that have either plain or ball raced bearings. Both types of carrier are 22mm (7/8") wide for calculating stacking distances. Carriers are normally attached to curtains at 300 mm, 250mm or 200mm centres. The leading carrier is 66mm (2 5/8") wide and this can be fitted with an overlap if required. The upper channel accepts an 8mm threaded tee nut with which to suspend the track with a selection of standard or Unistrut type brackets and studding. There are 2 'L' shaped slots in the side of the track for attaching the track flush to a soffit or ceiling with 3W30 ceiling clips. At the bottom corners of the extrusion are 2 keyhole slots that accept roll pins to align the running surfaces when the track sections are joined. Each joint set comprises a flat plate with 4 grub screws that fits into the top slot and 2 roll pins.

2WAY is intended to be used for systems where cording is not required such as side masking curtains, perimeter tracks in studios, for acoustic curtains and any application where walk along operation is required.

2WAY can be rolled to any radius; the minimum is 500mm, (1' 8"). 2WAY is stocked in 6.1m (20 feet) lengths.

2way components

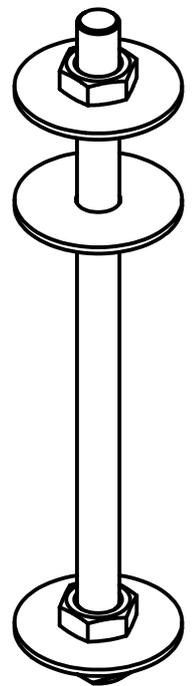


2W18 Studing




3W30 Ceiling clips




M8 Erail nut

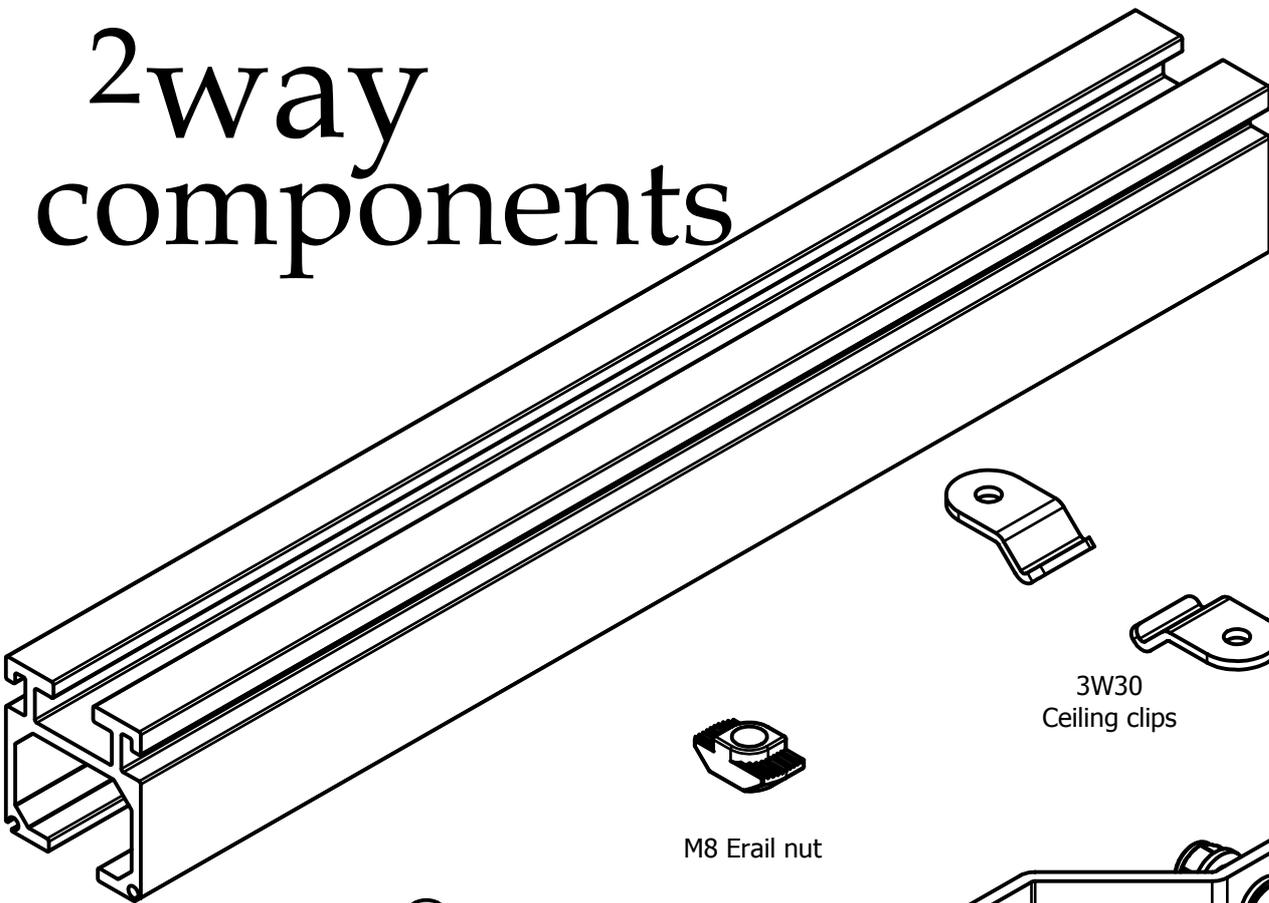

2W01 Extrusion

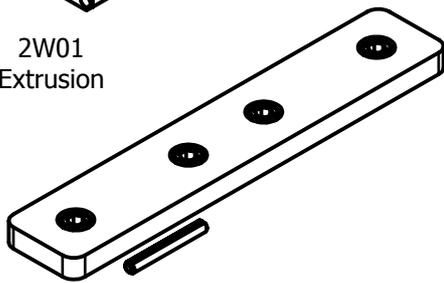


2W05 Joint set

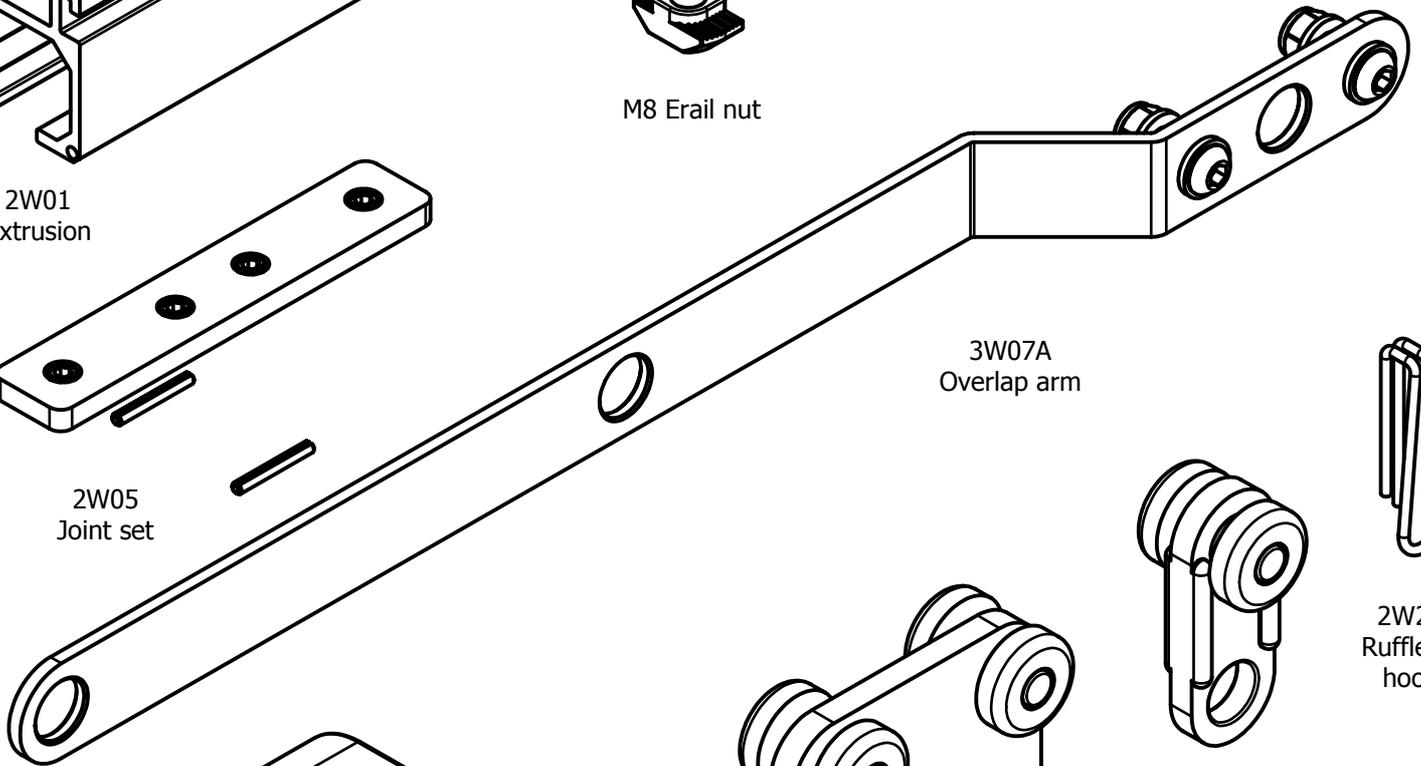


3W07A Overlap arm




2W29 Rufflette hook



3W06 2 wheeled runner

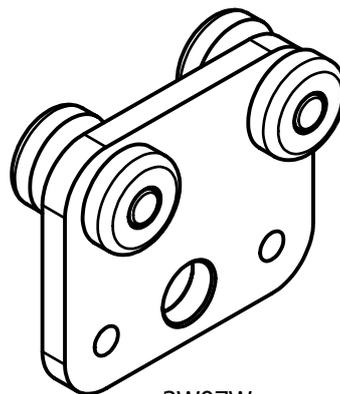

3W07W Master runner

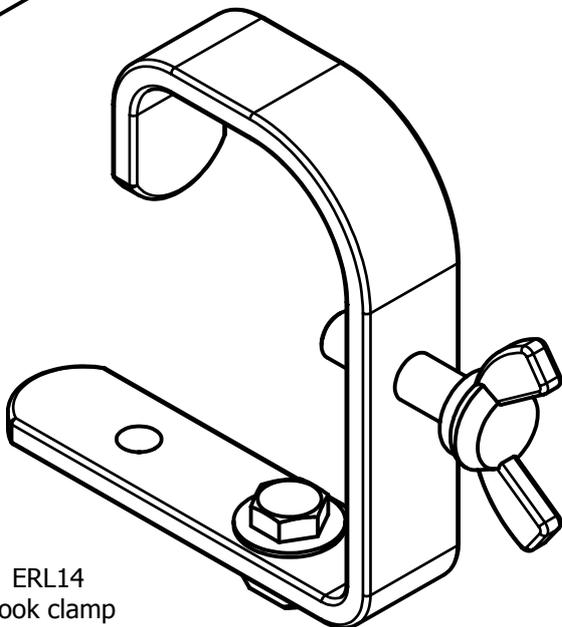

ERL14 Hook clamp



3W24 Walkalong endstop

