




**acoustic**  
CURTAINS

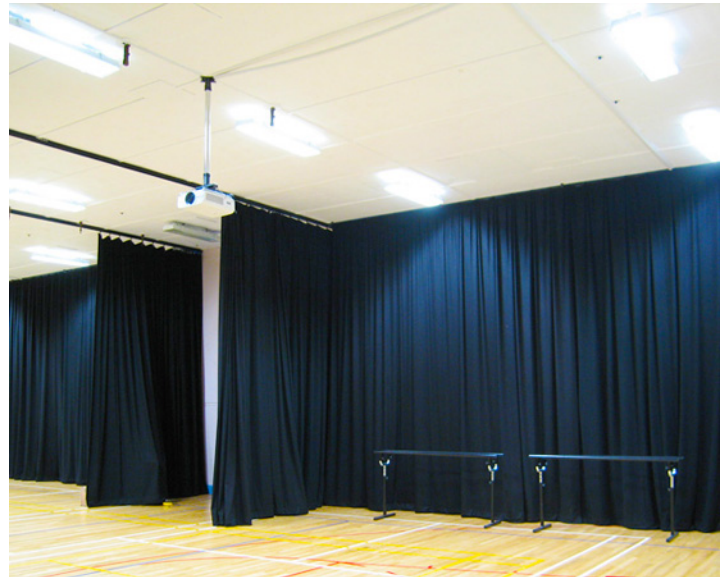

Specialists in Acoustic Curtains  
and Curtain Track Systems

## Black Wool Serge Curtains

The industry standard for perimeter treatment, known for providing excellent sound absorption

## Black Wool Serge Curtains

The industry standard for perimeter treatment, known for providing excellent sound absorption. Suitable for commercial and domestic use, providing good acoustic properties whether sewn flat or with fullness.

We can manufacture curtains with a variety of headings and to various degrees of fullness to suit the application. We can also supply fabric in standard 150cm width, either by the linear metre or in complete rolls.

Fabric Type	Weight
Standard Wool Serge	470g/m <sup>2</sup>
Premier Wool Serge	565g/m <sup>2</sup>
Heavy Wool Serge	625g/m <sup>2</sup>
Kilo Wool Serge	800g/m <sup>2</sup>

All of our Black Wool Serge Curtains meet the requirements of BS5867: Part 2: B which is the British Standard for flame retardant fabrics used for the manufacture of curtains or drapes. All are woven from fibres with a high flame retardancy to create an IFR (Inherently Flame Retardant) Fabric.

### Sound Absorption Coefficients, tested in accordance with BS EN ISO 354: 2003:

Frequency (Hz)	125	250	500	1k	2k	4k
Standard Wool Serge	0.15	0.45	0.80	0.90	0.80	0.85
Premier Wool Serge	0.15	0.50	0.80	0.90	0.85	1.00
Heavy Wool Serge	0.30	0.85	0.85	0.95	0.95	0.95
Kilo Wool Serge	0.40	0.90	0.85	1.00	1.00	1.05

(The above figures are based on curtains with 50% fullness spaced 100mm from a wall.)

## Sound Reduction Index (SRI):

Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
Standard Wool Serge	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Premier Wool Serge	1.0	1.7	2.1	3.7	5.0	5.0	5.7	5.7
Heavy Wool Serge	2.7	2.5	2.3	3.7	4.3	4.6	5.0	5.0
Kilo Wool Serge	3.6	2.8	3.7	6.2	7.4	8.2	8.1	8.7